



CIN: U74999KA2017PLC100268, GSTIN: 29AAYCS3808B1Z0, PAN: AAYCS3808B, TAN: BLRS63059D
Web: <http://shivamoggasmartcity.in/> E-mail: shivamoggasmartcity@gmail.com Phone No: 08182-279951

Sl. No: SSCL/TECH/CR/91/2021-22/

Date: 18.08.2021


ದರಪಟ್ಟಿ ಪ್ರಕಟಣೆ

Tunga leftbank Canal redevelopment (Stretch-1) ಕಾಮಗಾರಿಯು ಈಗಾಗಲೇ ಪ್ರಗತಿಯಲ್ಲಿದ್ದು ಪೂರ್ಣಗೊಳ್ಳುವ ಹಂತದಲ್ಲಿರುತ್ತದೆ. ಸದರಿ ಕಾಮಗಾರಿಯ ಸ್ಪೋರ್ಟ್ಸ್ ಪಾರ್ಕ್‌ನಲ್ಲಿ ಒಳಾಂಗಣ Badminton ಕೋರ್ಟ್ ಕಾಮಗಾರಿಯನ್ನು ಕೈಗೆತ್ತಿಕೊಂಡಿದ್ದು ಸದರಿ ಕಾಮಗಾರಿಗೆ ಅವಶ್ಯಕವಿರುವ **Wooden flooring ಮತ್ತು synthetic flooring Items** ಗಳಿಗೆ ಅನುಮೋದಿತ ಕಂಪನಿಗಳಿಂದ ದರಪಟ್ಟಿ ಆಹ್ವಾನಿಸುವ ಬಗ್ಗೆ.

Sl. No	Description	Rate
1	<ol style="list-style-type: none"> 1. Supply, installation and finishing of wooden floor complying with DIN, FIBA & WSF international standards as per following details: 2. The wooden floor area is approximately 7.0mx14.5m. 3. Supplier shall give minimum 10years warranty period 4. 0.6mm thick layer of water barrier layer over the given plane surface to be provided such that the sheet laid should not tear to the given load or impact. 5. Floor board should be four side tongue & groove with square edge. 6. Anti-termite treated teak/maple wooden battens of size 70mm to be placed on the vapour's barrier at 350 mm Centre to centre or less as per the required overall sport cushioning effect. 7. Runners to be fixed on the Bottom side with minimum 20mm thick air-cell cushioning pads by staple through both ways at 350 mm Centre to Centre. 8. Kiln seasoned, and treated Maple wood engineered floor boards assembled from two rows of tongue and grooved staves of varying lengths. The length of the floor boards will be minimum 1700mm & up in length except at the end of each row 125mm width & thickness of 21mm. 9. The gap between the wooden flooring and surroundings tiled area will be 6mm on all sides. 10. The floor boards will be prefinished with one coat of polyurethane at the bottom 11. The wooden flooring level shall match with adjacent metallic flooring. 12. For all the joints detailed, the screw shall be driven from the top of the joist down to the floor below. The nailing for the floor boards shall be in tongue groove joint passing down into timber joist arranged below. Generally, these are concealed by putty, etc, and then the floor surface is level finished 13. Polished such that it should get sweat & saliva resistance according to DIN53160-1/2 14. Impact resistance should be greater than 2N 15. Abrasion resistance should be as per DIN EN438-2. 16. Game line markings to be carried out in required colour before applying the finish coat. 17. All the above work is to be carried out as per the approved drawing and directions of the Authorities/Engineer-in-charge. 18. The drawing enclosed is for reference only and the dimensions to be followed as same and if any modifications are required as per the same is to be intimated with proper drawing and details. 19. The quoted rate shall include cost of procurement of equipment's, installation, erection its cutting, grinding, finishing, craftsmanship, treatment with deep 	

	<p>penetration of approved water based waterproofing chemicals and making all necessary provisions to make floor workable, the cost of design, approvals, pumps, SSC ramps, anchor fasteners, silicon sealants, labour charges, scaffolding, all tools and tackles, working at all levels. Leads and lifts etc. to fit at site, as per site conditions complete, to the satisfaction</p> <p>20. The indicative sizes & quantities mentioned are given as a base guideline only, based on the finished sizes & requirement of working as per drawings. The Contractor is required to work out the actual quantities to be supplied and executed at site, considering all margins.</p> <p>21. The dimensions given above are for finished sizes only. The size of floor shall be kept extra on all the four sides, to provide adequate margins for cutting and adjustments at site as well as to take care of damage to the floor during handling, erection and transportation.</p> <p>22. All the equipment's, supply, designs, erection, installations for the floor shall be as per the designs and directions given by authority. However, SSCL/TCE reserves the right to change/ vary the same before bulk production i.e. up to the sample approval stage, for which no extra cost shall be paid to the Contractor.</p> <p>23. The defect liability period will be for 24 months from the commissioning and hand over of the project.</p>	
2	<p>Supply with Installation of Badminton Mat (Make: Yonex) (Thickness:4.5mm) with Game Line Marking as per BWF Standard ,BWF Approved, Material:100%PVC,Total Size: 15m x 7.1m, Roll Width:1.42m, Roll Length:15m, Colour:Green, Weight:300 Kgs, Method of Set up: Joint by tape, Shock Absorption:26%, Vertical Deformation:0.80mm.</p>	

ಮೇಲ್ಕಂಡ ಕೆಲಸಕ್ಕೆ ದರಪಟ್ಟಿಯನ್ನು ಆಹ್ವಾನಿಸಿದ್ದು. ತಮ್ಮ ದರಗಳನ್ನು/ ದರಪಟ್ಟಿಗಳನ್ನು ಕಛೇರಿಗೆ ಮುದ್ದಾಂ ದಿನಾಂಕ:25.08.2021ಅಪರಾಹ್ನ 04.00 ರೊಳಗಾಗಿ ಸಲ್ಲಿಸಲುಕೋರಲಾಗಿದೆ.

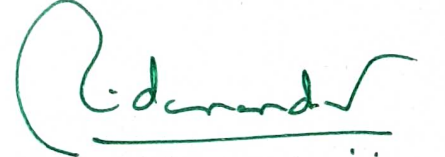

ವ್ಯವಸ್ಥಾಪಕ ನಿರ್ದೇಶಕರು
ಶಿವಮೊಗ್ಗ ಸ್ಮಾರ್ಟ್ ಸಿಟಿ ಅಮಿಟೆಡ್
ಶಿವಮೊಗ್ಗ

ಪ್ರತಿಯನ್ನು:

1. ಕಛೇರಿಯ ಸೂಚನಾ ಫಲಕಕ್ಕೆ.
2. ಕಛೇರಿ ವೆಬ್ ಸೈಟ್ ಗೆ.